



Widerstand / resistor
Kabel / cable 3 x 1,5mm²

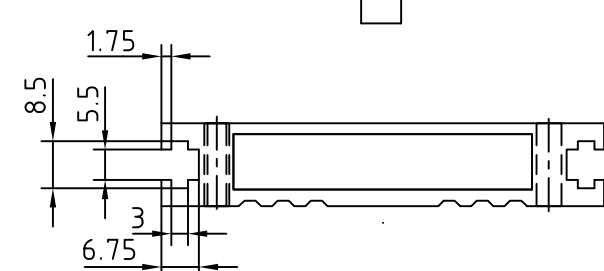

Nicht zulässige Montage
not permissible installation



Kabel oben
cable on top

Type / type	Größe/ size	Abmessungen/ dimensions		Gewicht weight g
		A	B	
GWAE(U)	110 x 80	110	98	380
GWAE(U)	160 x 80	160	148	500
GWAE(U)	216 x 80	216	204	630
GWAE(U)	320 x 80	320	2 x 154	930
GWAE(U)	420 x 80	420	2 x 204	1180
GWAE(U)	520 x 80	520	4 x 127	1430

(U) mit / with UL-Recognition

Schutzart / Degree of protection		IP 54		Allgemein- toleranz ISO 2768-m		Maßstab :		Gew.		
						Werkstoff :				
8				Datum	Name	Gekapselter Widerstand mit 0,75m geschirmter Leitung Enclosed resistor with 0,75m shielded connection cable				
7				Bearb	24.08.06					Lutz
6				Gepr						
5				Norm						
4										
Type / type:		GWAE(U)		110 - 520 x 80				Blatt		
FRIZLEN		D-71712 MURR		13 M 0565						
Zust		Änderung		Datum		Name		Ers. f.:		
								Ers. d.:		

ALADU-LI