

A

B

C

D

E


F

1


2

3

4

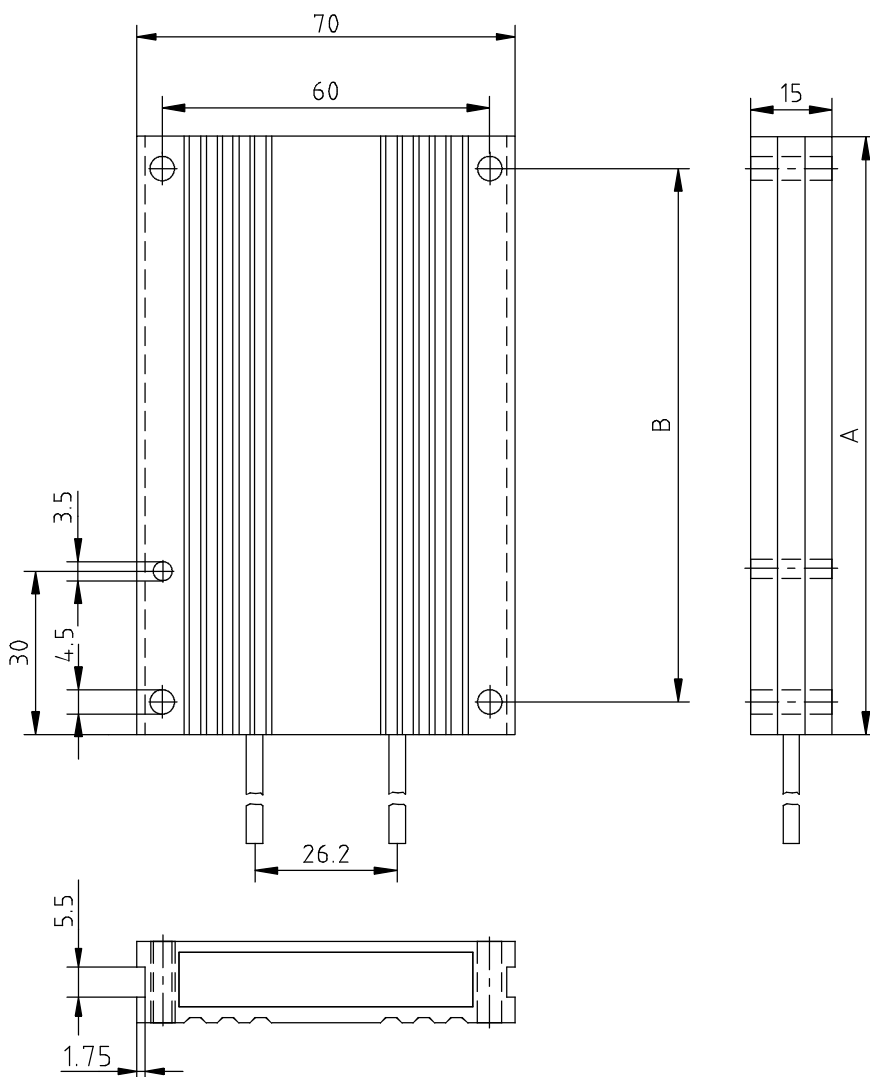

Nicht zulässige Montage
not permissible installation



Kabel oben
cable on top

(U) mit / with UL-Recognition

Type / type	Type / type	Größe / size	Abmessungen / dimensions		Gewicht / weight
			A	B	
GXAD(U)	GXMD(U)	110 x 70	110	98	300
GXAD(U)	GXMD(U)	160 x 70	160	148	420
GXAD(U)	GXMD(U)	216 x 70	216	204	550
GXAD(U)	GXMD(U)	320 x 70	320	2x154	300
GXAD(U)	GXMD(U)	420 x 70	420	2x204	420
GXAD(U)	GXMD(U)	520 x 70	520	4x127	550

Schutzart: IP 40
Degree of protection: IP 40

Allgemein-
toleranz
ISO 2768-m

Maßstab :
Werkstoff : Al xxxxx blank

Gew.

8				Datum	Name
7				Bearb 10.12.07	Lutz
6				Gepr	
5				Norm	
4					
3	Type hinzu.	02.11.12	Pi.	FRIZLEN D-71712 MURR	
2	Pos. Leitungen	01.07.10	DT.		
1	Gewichtseinheit	31.07.08	DT		
Zust	Änderung	Datum	Name		

Gekapselter Widerstand enclosed resistor	
Type:	GXAD(U) / GXMD(U) 110 - 520 x 70
type:	GXAD(U) / GXMD(U) 110 - 520 x 70
13 M 0600	
Blatt	
Ers. f.:	Ers. d.: